

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 7/005	A1	(11) International Publication Number: WO 00/19634 (43) International Publication Date: 6 April 2000 (06.04.00)
(21) International Application Number: PCT/EP99/06631 (22) International Filing Date: 8 September 1999 (08.09.99) (30) Priority Data: 9821089.1 30 September 1998 (30.09.98) GB (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (72) Inventor: MOULSLEY, Timothy, J.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DEGUELLE, Wilhelmus, H., G.; Internationaal Oc- troobureau B.V., Prof. Holstlaan 6, NL-5656 AA Eind- hoven (NL).		(81) Designated States: CN, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: METHOD FOR THE COMMUNICATION OF INFORMATION AND APPARATUS EMPLOYING THE METHOD

(57) Abstract

A method and apparatus for transferring information over a communications link includes transmitting information at a first power level, monitoring for correct reception of the transmitted information and transmitting further information at a second, greater power level than that used for the original transmission if correct reception did not occur. The further information allows the content of the originally transmitted information to be established and in one embodiment constitutes a retransmission of the originally transmitted information. By retransmitting at a greater power level the probability of correct reception is enhanced, especially when the communications link is wireless. A transmitter employing the present invention may offer reduced power consumption since the transmission power level used for the original transmission may be lower than that used by a transmitter not benefiting from the present invention.

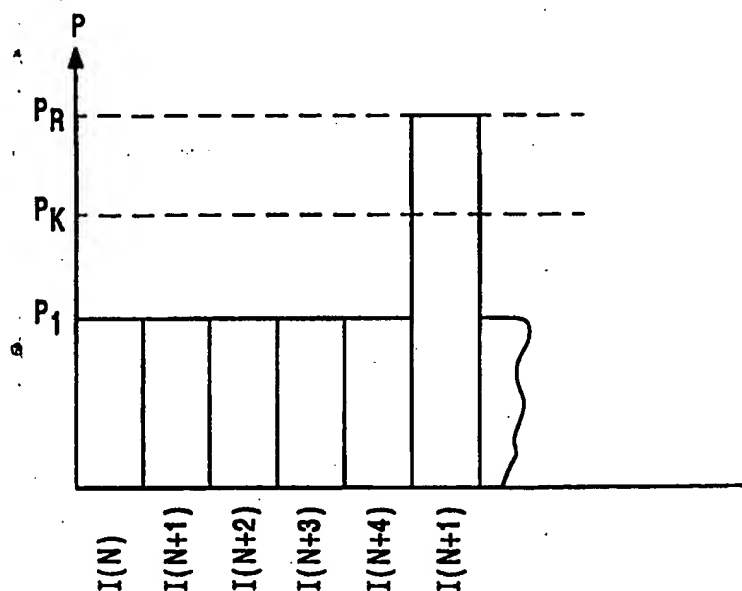

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 00/19634

PCT/EP99/06631

1

DESCRIPTION

**METHOD FOR THE COMMUNICATION OF INFORMATION
AND APPARATUS EMPLOYING THE METHOD**

5

The present invention relates to digital communication systems and more particularly to the exchange of information over wireless digital communication links of varying quality. In comparison to links which are wired, a greater variation in quality is usually observed in wireless links, for example the radio
10 links found in a cellular mobile radio telephone system between mobile telephones and basestations.

Communication systems, including cellular mobile telephone systems and networks are making increasing use of digital technology. Cellular mobile
15 telephone networks require a wireless radio communication link to be established between a mobile terminal and a basestation. Second generation cellular mobile telephone systems exchange digital signals over the wireless radio communications link.

Digital systems can be exploited to provide greater spectral efficiency of
20 a radio communications link than is offered by an analogue system and digital processing can often minimise the effects of interference.

In communication systems that rely on wireless links, such as mobile communications systems, the quality of these links can vary considerably. A number of factors influence the quality of the link and the system must be
25 tolerant of any such variation. In systems employing an analogue link, a reduction in link quality may merely result in a noisy but tolerable link being established. However, in systems employing a digital link, it is important that the information sent over the link can be faithfully recovered at the receiving end, even when the link quality is poor. The effect of incorrectly received information
30 depends on the application. For example, in the case of a digital cellular mobile radio telephone system employing a wireless radio link, during a telephone conversation, incorrect reception and loss of information over the link may just

WO 00/19634

PCT/EP99/06631

2

result in a temporary muting of sound. However, with the advent of mobile computing, mobile telephone cellular networks are increasingly used for the communication of data and in this situation any loss of data is unacceptable.

Various techniques are known for assisting with correct communication of digital information over a range of media and some of these techniques fall into the category of error detection and correction. One technique is forward error correction (FEC) which involves encoding information prior to transmission in such a way that any errors occurring during communication may be identified and corrected on reception. Another technique is to employ an automatic repeat request (ARQ) error control scheme which involves the retransmission of information that is deemed to have been erroneously received or not received at all. There are various derivatives of the basic ARQ scheme and these are employed depending on the feasibility of providing buffer space at the transmit/receive ends of the link and the requirement to utilise the link efficiently. Indeed some ARQ schemes do not merely retransmit the same information. In the case of these schemes retransmission involves the (re)transmission of only a portion of the information, transmission of appropriate FEC information or any combination thereof. Various ARQ schemes are well known to the person skilled in the art, as is the fact that retransmission may be initiated in the absence of an acknowledgement that information has been received correctly or even incorrectly. This is in contrast to the situation where an explicit request for retransmission is sent to the transmitter. When FEC and ARQ techniques are combined they can provide a powerful error detection and correction mechanism and in certain implementations ARQ operation only becomes active if FEC fails to recover information. However both techniques are most effective when the quality of the link is more predictable and consistent as may be provided, for example, by a co-axial cable although wired twisted pair links are susceptible to noise. In contrast, with wireless radio communication links, such as those employed between mobile cellular telephones and basestations, the link quality is constantly changing due to the movement should the terminal be mobile, obstructions caused by buildings, the geography of the area, weather conditions and the distance of the wireless link. In particularly poor conditions

WO 00/19634

PCT/EP99/06631

3

ARQ techniques will result in multiple retransmissions occurring which may cause a delay in data communication and an overall increase in system power consumption. Where components of the system, for example mobile terminals, rely on battery power this is particularly undesirable.

- 5 Where the radio link quality deteriorates because of large signal fluctuations, for example at the onset of a deep fade, various prior art remedies have been proposed.

US-A-5 105 423 describes a method of shifting down a data transmission rate in response to a request from a receiver for retransmission of data frames
10 having errors in them. The data transmission rate is shifted down from a first data rate to a second data rate which is used for retransmission. The shift down rate is calculated based on the possibility of errors re-occurring during retransmission, which is in turn calculated on the basis of the percentage of frames that need to be re-transmitted. The reduction in transmission rate is
15 undesirable in certain applications especially those where rapid data transmission is a priority.

US-A-5 128 965 describes a radio link system where overall transmission power is increased should the receiver indicate that the number of errors in the received information exceeds a particular threshold. A system described in US-
20 A-5 713 074 employs power controller apparatus to increase transmit power when an error is detected in a transmitted signal, and to reduce the transmit power by a smaller amount when no error is detected, thus maintaining a constant bit error rate. Error detection is facilitated by returning the received signal to the transmitter and comparing the received signal to that transmitted.

25 The standard TIA/EIA-95-B published on 3rd February 1999 by the Telecommunications Industry Association is developed from interim standard TIA/EIA/IS-95 which describes the process where a mobile terminal signals a fixed system over the air interface for the purpose of gaining access. If the mobile terminal does not receive a reply from the fixed system, the mobile
30 terminal repeats the signalling process but with an increased transmission power. This signalling process is concerned only with the task of obtaining access and not with the transfer of traffic.

WO 00/19634

PCT/EP99/06631

4

In accordance with a first aspect of the present invention there is provided a method of transferring traffic information in units over a wireless digital communications link between a transmitting station and a receiving station comprising the steps of transmitting first information units at a first power level; monitoring if correct reception of the transmitted units occurred; and transmitting second information units associated with the first information units, for which first information units the monitoring did not indicate correct reception occurred, at a second power level, which is greater than the first power level, the second information units allowing the content of the first information units to be established.

In one preferred scheme in accordance with the above aspect, the content of the second information units is the same as the content of the first information units. In this case transmission of the second information units constitutes a retransmission of the first information units. In a second preferred scheme in accordance with the above aspect the content of the second information units comprises a portion of the content of the first transmission units. In this case transmission of the second information units constitutes a partial retransmission of the first information units. In a third scheme in accordance with the above aspect the second information units include error correction information and in particular forward error correction information, associated with the first information units. In a fourth scheme in accordance with the above aspect the second information units include enhanced error correction information and in particular enhanced forward error correction information, associated with the first information units. One or more of the above schemes may be combined as will be appreciated and understood by the person skilled in the art.

By transmitting the second information units at a greater power level the probability of successful transfer of information is greatly enhanced in situations where failure of the original transmission of first information units occurred, in particular if this is due to a low received signal level. While this is a robust transfer method, another advantage attributed to the increased likelihood of

WO 00/19634

PCT/EP99/06631

5

successful transmission of second information units is a reduction in the probability of long transmission delays that can result through the occurrence of multiple transmissions of second information units. This is of particular benefit where there is a maximum allowable transmission delay, for example in real-time or substantially real-time systems.

Typically, monitoring is performed by the transmitting station based on information provided by the receiving station. The information provided by the receiving station will vary depending on the implementation of the method, although examples of the information provided include identification of correct transfer of units or of incorrect (corrupted) transfer of units or both. The monitoring performed by the transmitting station could also include circumstances where no monitoring information is received from the receiving station for given first information units, which is interpreted as indicating that correct reception of the first information units did not occur.

The method may be used in conjunction with forward error correction (FEC) techniques as mentioned above. In this case there may be no need to transmit associated second information units for first information units that have been incorrectly received (corrupted) if the content of the transmitted first information units can be recovered by FEC techniques at the receiving station. Preferably the monitoring step suitably accommodates for this eventuality, for example through the receiving station not providing information that would initiate a transmission of second information units.

Preferably the first power level is selected to be the lowest level which corresponds to a maximum allowable probability of failed transmission and consequent transmission of associated second information units.

In accordance with a second aspect of the present invention there is provided a digital wireless communications system comprising at least one transmitter having means for transmitting first information units at a first power level; at least one receiver having means for receiving the transmitted information units; control means for controlling the transmitter output power; and monitoring means for monitoring if correct reception of the transmitted units occurred at the receiver, wherein the transmitting means transmits second

WO 00/19634

PCT/EP99/06631

6

information units associated with the first information units for which first information units the monitoring means does not indicate correct reception has occurred, the second information units being transmitted at a second power level that is greater than the first power level, the second power level being selected by the control means and wherein the second information units allow the content of the first information units to be established. In this case the control means could be made responsive to the monitoring means.

In accordance with a third aspect of the present invention there is provided a transmitter station for digital wireless transmission of traffic information to a receiver, said transmitter station having a transmitter for transmitting first information units at a first power level; control means for controlling the transmitter output power; and monitoring means for monitoring if correct reception of the transmitted units occurred at the receiver, wherein the transmitter transmits second information units associated with the first information units for which first information units the monitoring means does not indicate correct reception has occurred, the second information units being transmitted at a second power level that is greater than the first power level, the second power level being selected by the control means and wherein the second information units allow the content of the first information units to be established. In this case the control means could be made responsive to the monitoring means.

Preferably the control means of the system or transmitting station selects the first power level to control the average power consumption of the transmitter in order to maintain a minimum average power consumption taking into account the first power level and the second power level for the consequent probability of transmission of second information units. This is particularly beneficial where power is provided by an exhaustible power source such as a battery. Alternatively the first power level may be set to maintain a minimum average power consumption for an allowable maximum probability of transmission of second information units occurring.

The invention will now be described by way of example with reference to

WO 00/19634

PCT/EP99/06631

7

the accompanying drawings.

Figure 1 is a schematic representation of a typical cellular mobile radio telephone communications system employing at least one wireless radio communications link.

5 Figure 2 is a schematic representation of components in a transmitter stage from the system of Figure 1.

Figure 3 illustrates the operation of a typical known automatic repeat request (ARQ) error control scheme.

10 Figure 4 illustrates the operation of an implementation of an error control scheme in accordance with the present invention.

Referring to Figure 1, a communications system 1 in the form of a cellular mobile radio telephone system includes a switching centre 10, which is connected to the public switched telephone network (PSTN) and to other data
15 networks if required. The switching centre is typically one of a number of switching centres and a number of basestations 20 are connected to each switching centre. The main function of the basestations 20 is to establish a radio link 30 with a terminal 40, such as a mobile telephone and therefore allow communication between the mobile terminal 40 and the rest of the system.
20 Although the system employs a radio link, the present invention relates also to transmitting information over other types of links that do not necessarily operate in the radio frequency part of the electromagnetic spectrum, and such references to "radio" links are made by way of example only. Each basestation 20 is usually capable of supporting a plurality of such links 30 and therefore a
25 plurality of mobile terminals 40. The basestation 20 and the terminals 40 are each provided with radio transmitting and receiving means for establishing the links 30. It is assumed that the radio link 30 is digital and furthermore may employ techniques such as Time Division Multiple Access (TDMA) or Code Division Multiple Access (CDMA).

30 In use, the quality of a link 30 established between the basestation 20 and the terminal 40 will vary considerably and the system must be tolerant of fluctuating link quality. Where digital information is being exchanged, as in the

WO 00/19634

PCT/EP99/06631

8

present example, this may result in the incorrect reception of digital information.

Error correction techniques such as forward error correction (FEC) may be employed which can allow recovery of the correct information from the incorrectly received information. As the quality of the link 30 deteriorates further

5 FEC techniques may not be adequate to recover the correct information and in this case there is no alternative but to initiate further transmission for any incorrectly received information. These further transmissions may take a variety of forms although one practice is to employ ARQ schemes as mentioned earlier.

In each case, regardless of the scheme chosen the further transmissions may
10 be considered as the transmission of second information units that are associated in some way to (failed) previously transmitted first information units.

As also mentioned above the further transmissions (of second information units) can involve a straightforward retransmission of information, (re)transmission of only a portion of the information, transmission of appropriate FEC information,
15 transmission of enhanced FEC information or any reasonable combination thereof. However, for the purpose of illustrating the present invention, and by way of example only, the following specific description relates to a typical ARQ scheme where the transmission of second information units actually constitutes a repeat transmission of (failed) first transmission units.

20 The retransmission of information occurs without the intervention of a user and is therefore called an automatic repeat request (ARQ). By way of example only, a typical ARQ scheme may be understood by reference to Figure 3 which shows the frame sequence of a so called selective RQ scheme ARQ implementation (where a frame is a unit of information transferred across the
25 data link 30 of this example). This known scheme is discussed in more detail in the publication "Data Communications, Computer Networks and OSI" (second edition) at page 126 - 127 by Fred Halsall and published by the Addison-Wesley Publishing Company. Although information often flows in both directions across a link, Figure 3 shows a situation where information is being
30 sent from a sender (S) to a receiver (R) in the form of a number N of information frames I. Each transmitted frame contains a unique identifier which allows the sender S and the receiver R to keep track of individual frames. Both the sender

WO 00/19634

PCT/EP99/06631

9

and the receiver are provided with buffer storage space C_s and C_R respectively to record the frames that have been sent or received. When, for example, the frame I (N) denoted as 101 is transmitted by the sender S, this is recorded in the buffer C_s . Frames are sent continuously and the contents of C_s form a
5 (provisional) retransmission list. The receiver R returns an acknowledgement ACK to S for each correctly received frame and also records a list of correctly received frames in the buffer C_R . When the sender S receives acknowledgement ACK from the receiver R that a particular frame has been received correctly, sender S removes from the buffer C_s the entry that
10 corresponds to that acknowledged frame. Each I frame is coded to permit the receiver R to establish that the I frame is not corrupted. Various ways of doing this include the use of cyclic redundancy check (CRC) error checking. Now with further reference to Figure 3, it is assumed that frame I (N+1) which is denoted as 102 becomes corrupted during transmission which is shown as a crossed
15 line. This results in the absence of an acknowledgement for the I frame N+1 while acknowledgement ACK of the other illustrated frames N, N+2, N+3 ... occurs normally. The sender S detects frame N+1 has not been acknowledged causing sender S to retransmit the frame as is denoted at 103. Depending upon the particular implementation of the ARQ scheme, subsequent retransmission
20 may occur until correct receipt of a frame is acknowledged.

Where multiple retransmissions occur this can cause problems in certain systems. Firstly, multiple retransmissions may cause a significant delay. A second problem occurs in systems where large messages are transferred which are required to be broken into a number of frames. Because the frames must
25 be reassembled in the correct order before the message can be recovered, this can require the use of large buffer storage space for temporary storage of frames received out of sequence. This is illustrated in the above example where frame (N+1) is retransmitted after transmission of frame (N+4). In order to recover the original message it is necessary for the receiver R to buffer the
30 frames N+2, N+3 and N+4 which have been received out of sequence. Alternatively, or in addition to this buffering, the transmitter may buffer frames ready for retransmission.

WO 00/19634

PCT/EP99/06631

10

In data communication systems employing a physical link, such as a coaxial cable, incorrect transfer of information is frequently caused by spurious noise or collision of data, in which case simple retransmission of data is likely to be successful on the first attempt. However, in the case of a wireless communication link, such as that employed between a mobile terminal 40 and a basestation 20, incorrect transmission of information is often caused by a weak signal reaching the receiving end of the link. Furthermore this signal strength may be constantly varying due to a changing operating environment and in these situations a simple retransmission of incorrectly received information may be unsatisfactory. In this case and in accordance with the present invention, information that needs to be retransmitted is sent over the link 30 with a transmission power that is greater than the transmission power used to transmit that information originally. This is illustrated in Figure 4, which shows the same frame transmission sequence of Figure 3 along the x-axis and transmission power on the y-axis. Frames are normally transmitted at power P_1 , whereas retransmitted frames are transmitted at power P_R . This increases the probability of repeated information being successfully received on retransmission, especially under conditions where signal strength is weak or fading occurs. Furthermore the increased likelihood of successful communication resulting on the first retransmission allows a smaller buffer space to be employed in the transmitter and/or receiver for storing frames or a list of frames. The increased likelihood of successful communication resulting on the first retransmission can also result in reduced delay when sending the information, which is advantageous when carrying real time information such as video or audio. Benefits may also result when transmitting other types of information for which a transmission delay beyond a predetermined period is unacceptable. The power amplitude of the retransmitted frames (second information units) may, for example, be in the order of 3dB higher than the power amplitude used for the initial transmission of the frames (first information units) although other amplitudes may be chosen to give different relative powers and the above value is not intended to limit the scope of the present invention.

Figure 2 shows components of the transmitter stage in a basestation 20

WO 00/19634

PCT/EP99/06631

13

retransmission power only after the first or a plurality of initial retransmission attempts have failed, thus providing greater scope for a reduction in power consumption.

Another variation on the basic scheme is to provide a progressive power increase for information that is retransmitted more than once. This further reduces the probability of unsuccessfully transmitted information being further delayed as a result of multiple retransmissions. In some cases it may be desirable to limit the maximum allowable number of retransmission attempts for a given initial transmission.

Whilst the present invention offers direct advantages in terms of reliable communication of information and a reduction in power consumption, other indirect advantages may be enjoyed through the correct implementation of the present invention. A lower initial (hence average) transmission power can result in reduced interference with other transmissions. An example of this in a cellular system would be observed as a reduction in overall co-channel interference (and a possible reduction in other types of interference) since the duration of the high power transmissions is relatively short. This can result in less interference to other users.

Although the present invention has been described with reference to a known ARQ scheme this is not intended to indicate any limitation. As described the present invention may be primarily considered as a special ARQ scheme in which case the information is generally digital data organised into frames or packets. In this case the invention may be considered as an automatic repeat request error control scheme wherein transmitted data frames or packets which are deemed to have been unsuccessfully communicated are complemented with further transmissions at a power level greater than the power used to transmit the data frames or packets originally. The present invention is also in keeping with techniques where first and subsequent transmissions or retransmissions may be combined to recover information. In such techniques it may be preferable to employ some type of averaging, and in this case may also be preferable to give more "weight" to information transmitted at a higher power. While the present invention will be of greatest use over a wireless radio link, it

WO 00/19634

PCT/EP99/06631

14

may also in principle be implemented in systems employing links of other mediums, for example co-axial cable, twisted pairs and so on, although the issue of power consumption is normally of minor importance in wired communication links. Furthermore, although the present invention has been

5 described with reference to an example employing transmission from a fixed terminal to a portable terminal, it will be apparent to the person skilled in the art that the present invention is not so limited in application. That is the present invention may be employed in the transfer of information in either direction over a communications link or in both directions, irrespective of the fact that the

10 transmitting station and/or receiving station is fixed or mobile. It will also be apparent to the person skilled in the art that in a two way communications system a transmitting station may be combined with a receiving station.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features

15 which are already known in the design, manufacture and use of systems and devices and component parts thereof and which may be used instead of or in addition to features already described herein.

WO 00/19634

PCT/EP99/06631

15

CLAIMS

1. A method of transferring traffic information in units over a wireless digital communications link (30) between a transmitting station (20) and a
5 receiving station (40) comprising the steps of:
transmitting first information units at a first power level;
monitoring if correct reception of the transmitted units occurred;
and
transmitting second information units associated with the first
10 information units, for which first information units the monitoring did not indicate correct reception occurred, at a second power level which is greater than the first power level, the second information units allowing the content of the first information units to be established.
- 15 2. A method in accordance with Claim 1 wherein the content of the second information units is the same as the content of the first information units.
3. A method in accordance with Claim 1 or 2 wherein the units are data frames or packets of data (101, 102, 103).
20
4. A method in accordance with Claim 1, 2 or 3 wherein monitoring is performed by the transmitting station (20) based on information provided by the receiving station (40).
- 25 5. A method in accordance with any one of Claims 1 to 4 wherein the first power level is selected to be the lowest level to correspond to a maximum allowable probability of failed first information units transmission and consequent second information units transmission.
- 30 6. A digital wireless communications system (1) comprising at least one transmitter (20) having means (50) for transmitting first information units (101, 102) at a first power level;

WO 00/19634

PCT/EP99/06631

16

at least one receiver (40) having means for receiving the transmitted information units;

control means (60) for controlling the transmitter output power;

and

5 monitoring means (70) for monitoring if correct reception of the transmitted units occurred at the receiver,

wherein the transmitting means (50) transmits second information units (103) associated with the first information units (101, 102) for which first information units (102) the monitoring means (70) does not indicate correct
10 reception has occurred, the second information units being transmitted at a second power level that is greater than the first power level, the second power level being selected by the control means (60), and wherein the second information units allow the content of the first information units to be established.

15 7. A transmitter station (20) for digital wireless transmission of traffic information to a receiver (40), said transmitter station having:

a transmitter (50) for transmitting first information units (101, 102) at a first power level;

control means (60) for controlling the transmitter output power; and

20 monitoring means (70) for monitoring if correct reception of the transmitted units occurred at the receiver,

wherein the transmitter (50) transmits second information units (103) associated with the first information units (101, 102) for which first information units (102) the monitoring means (70) does not indicate correct reception has
25 occurred, the second information units being transmitted at a second power level that is greater than the first power level, the second power level being selected by the control means, and wherein the second information units allow the content of the first information units to be established.

30 8. A communication system (1) or transmitter station (20) in accordance with claim 6 or 7 respectively wherein the content of the second information units is the same as the content of the first information units.

WO 00/19634

PCT/EP99/06631

17

9. A communication system in accordance with Claim 6 wherein the system (1) is a cellular mobile radio telephone system.

5 10. A transmitter station in accordance with Claim 7 wherein the transmitter station (20) is employed as a component of a cellular mobile radio telephone system.

10 11. A communications system or transmitting station in accordance with any one of claims 6 to 10 wherein the control means (60) selects the first power level to control the average power consumption of the transmitter (20, 50) in order to maintain a minimum average power consumption taking into account the first power level and the second power level for the consequent probability of transmission of second information units.

WO 00/19634

PCT/EP99/06631

1/2

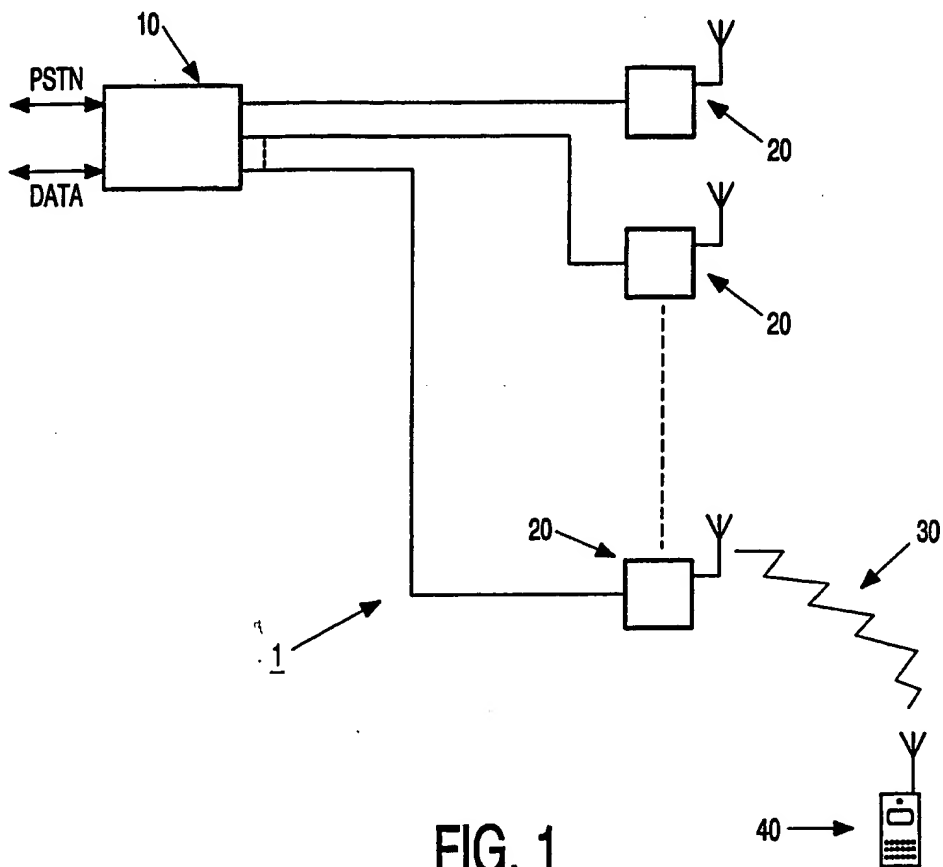


FIG. 1

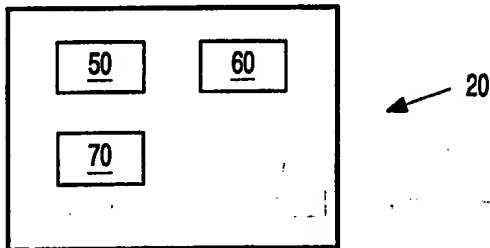


FIG. 2

WO 00/19634

PCT/EP99/06631

2/2

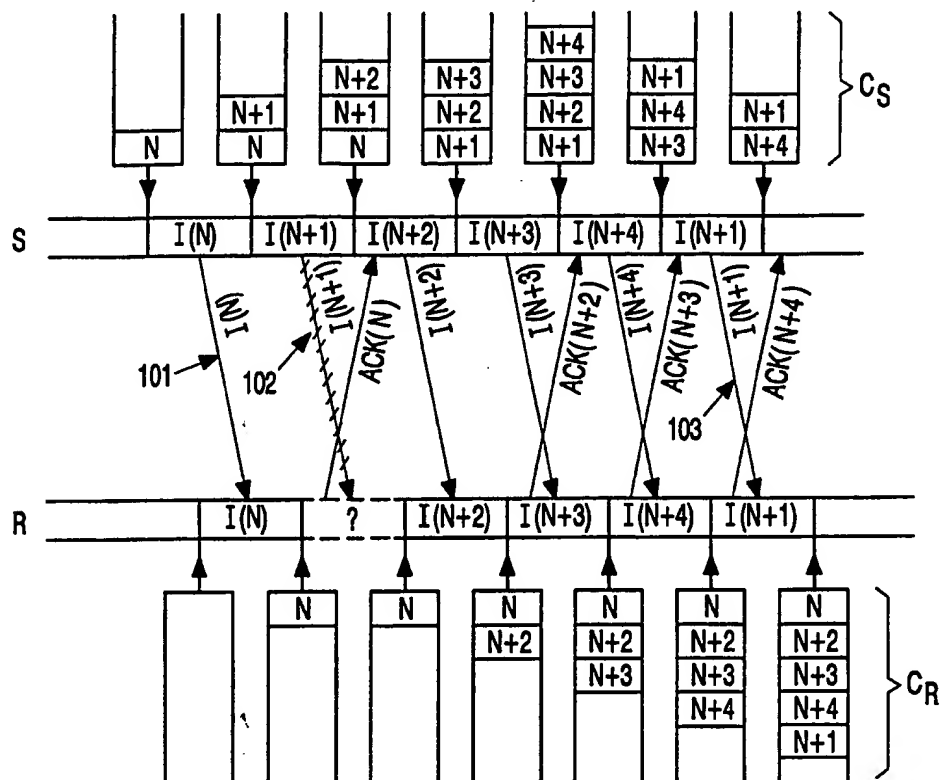


FIG. 3

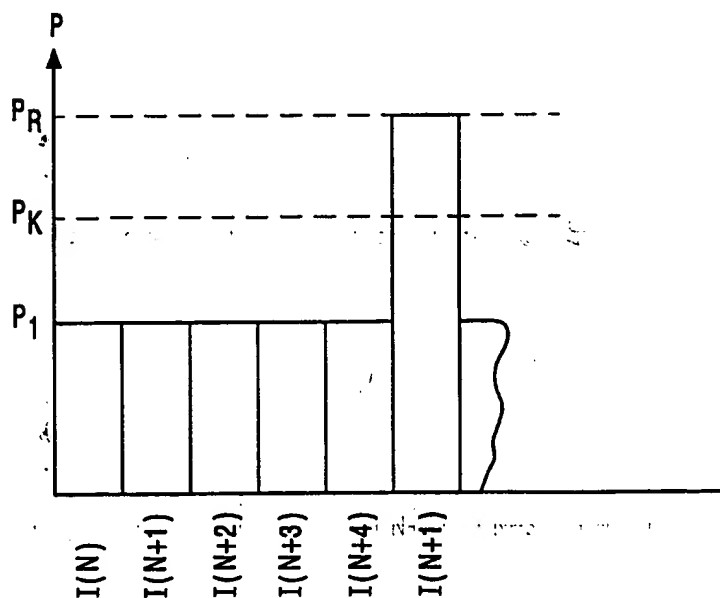


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/06631

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 24820 A (ERICSSON GE MOBILE INC) 10 July 1997 (1997-07-10) page 9, line 29 -page 10, line 21 page 12, line 4 -page 16, line 7 claim 1 figure 4	1-11
A	EP 0 790 713 A (LUCENT TECHNOLOGIES INC) 20 August 1997 (1997-08-20) page 3, line 26-39 page 4, line 32 -page 5, line 48 page 6, line 28-46 claims 1,4,5,7,12,15,16,18 figure 4	1-11



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

13 December 1999

Date of mailing of the international search report

22/12/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Yang, Y

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 99/06631

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 461 639 A (ZEHAVI EPHRAIM ET AL) 24 October 1995 (1995-10-24) abstract figure 5</p> <p>-----</p>	1,6,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/06631

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9724820 A	10-07-1997	AU 1425497 A	28-07-1997
		CA 2241256 A	10-07-1997
		CN 1209235 A	24-02-1999
		DE 69604303 D	21-10-1999
		EP 0872047 A	21-10-1998
EP 0790713 A	20-08-1997	US 5722051 A	24-02-1998
		CA 2196114 A	14-08-1997
		JP 9233021 A	05-09-1997
US 5461639 A	24-10-1995	US 5383219 A	17-01-1995
		AU 678874 B	12-06-1997
		AU 1187295 A	13-06-1995
		BR 9405789 A	12-12-1995
		CN 1116475 A	07-02-1996
		EP 0680675 A	08-11-1995
		FI 953501 A	20-07-1995
		IL 111689 A	16-08-1998
		JP 8506467 T	09-07-1996
		WO 9515038 A	01-06-1995
		ZA 9408424 A	29-06-1995